

TITAN

XC 3200 EF - XC 3600 EF


Electrohydraulic underbody double scissors type lift,
for tyre specialists, car workshops, and body repairers.



Electrohydraulic underbody double scissors type lift, for tyre specialists, car workshops, and body repairers.
Alignment of the runways with a dual **MASTER/SLAVE** circuit (**two cylinders per runboard**) without mechanical safety racks.
Runboards version with flaps (**F**).

All models available in both on-floor and flush installation versions.

Adjustment bolts with rubber to cushion the end of the stroke



Runways with suspended flaps which also act as vehicle access ramps.



Generously sized, self-lubricating sliding blocks.



Special **lift linkage**, for lifting loads even from the lowest lift height.



Unique arm geometry for maximum stiffness and minimised space usage.

TECHNICAL DATA

Model	TITAN XC 3200 EF	TITAN XC 3600 EF
Lift capacity	3200 kg	3600 kg
Lifting time	45 s	
Three phase motor	230/400V - 3kW 3Ph - 50/60Hz	
Single phase motor	230V - 3kW 1Ph - 50/60Hz	
Max. lifting height	1890 mm	
Lift min. height	105 mm	110 mm

SUPPLIED ACCESSORIES


- Self-lubricating bushings on all rotating parts
- Set of 4 rubber pads

OPTIONAL

- Pair of cross pieces and pads for off-road vehicles.
- Kit for pit installations.

DIMENSIONS

TITAN XC 3200 EF - TITAN XC 3600 EF

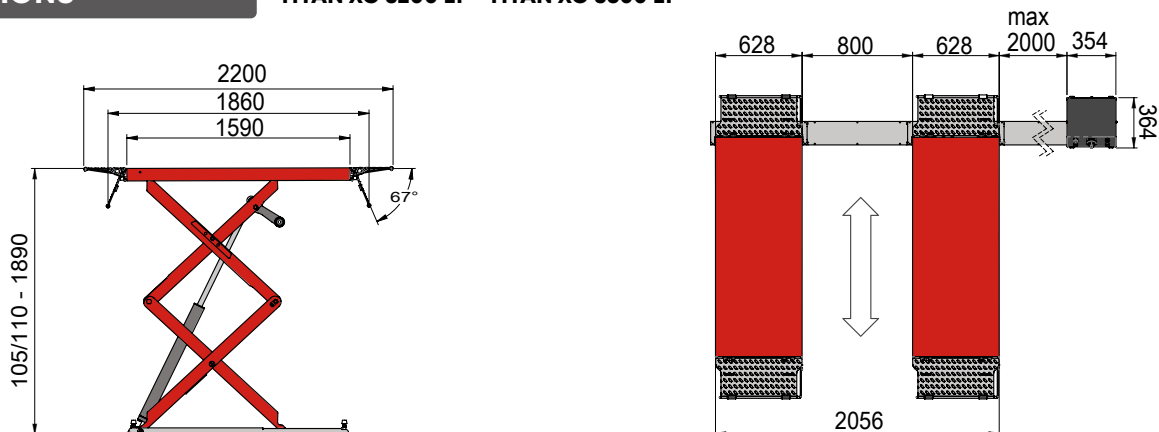

The manufacturer reserves the right to modify the features of its products at any time.